CE TEST REPORT

for

FMUSER HDMI Encoder

Model: FMUSER HDMI Encoder

Prepared for: FMUSER INTERNATIONAL GROUP LIMITED
2301M, 23/F, No. 179 Tianhe North Road, Tianhe District, Guangzhou

Prepared by: Europe Ber (Guangdong) Testing Co., Ltd
401 and 402, Building A, Tangxi Zhigu, No.21 Xijing Road,
Gushu Community, Xixiang Street, Baoan District, Shenzhen
TEL: 0755-23284856
FAX: 0755-23284856

Report Number: **EBSZ240712188E**
Date of Test: 2024-Jul-12 to 2024-Jul-18
Date of Issue: 2024-Jul-18

Tested by Wendy Lin
Wendy Lin

Approved by
Tommy Wei

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from EurBer Testing Technology.

Table of Contents

1.0 General Information **3**
1.1 Client Information 3
1.2 General Description of E.U.T. 3
1.3 Test Facility: 3
2.0 List of Measurement Equipment **3**
3.0 Technical Details **5**
3.1 Investigations Requested 5
3.2 Test Standards 5
3.3 Performance Criteria 5
3.4 Test standards and Results Summary Tables 6
3.5 Measurement Uncertainty（95% confidence levels, k=2) 6
4.0 Electromagnetic Interference Test results **7**
4.1 Power Line Conducted Emission Test 7
4.2 Radiated Emission Test 10
4.3 Harmonic Current Emissions 13
4.4 Flicker and Voltage Fluctuation 15
5.0 Immunity Test **16**
5.1 Electrostatic Discharge 16
5.2 RF field strength susceptibility (80MHz------ 1000MHz) 17
5.3 Electrical Fast Transient/Burst (EFT/B) immunity test 18
5.4 Surge test 19
5.5 Conducted Immunity test 20
5.6 Voltage Dips/Interruptions immunity test 21
6.0 CE Label **22**
7.0 Photos of the EUT **22**

1.0 General Information

1.1 Client Information

Application:	FMUSER INTERNATIONAL GROUP LIMITED
Address of Application:	2301M, 23/F, No. 179 Tianhe North Road, Tianhe District, Guangzhou
Manufacturer:	FMUSER INTERNATIONAL GROUP LIMITED
Address of Manufacturer:	2301M, 23/F, No. 179 Tianhe North Road, Tianhe District, Guangzhou

1.2 General Description of E.U.T.

Product Name:	FMUSER HDMI Encoder
Model:	FMUSER HDMI Encoder
Additional Model:	--
Trade Mark:	FMUSER
Rating:	100-240V~, 50/60Hz, 2A

Model Difference:	All models are identical to each other except out appearence.

1.3 Test Facility:

Name of Test Lab:	Europe Ber (Guangdong) Testing Co., Ltd.
Address of Test Lab:	401 and 402, Building A, Tangxi Zhigu, No.21 Xijing Road, Gushu Community, Xixiang Street, Baoan District, Shenzhen
Telephone:	+86-755-23284856
Fax:	+86-755-23284856

2.0 List of Measurement Equipment					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date

Conducted emission					
EMI Test Receiver	ESCS30	1102.4500.33	RS	2024.3.08	2025.3.07
LISN	LS16C	10010947251	AFJ	2024.3.08	2025.3.07
Radiated emission					
EMI Test Receiver	ESVD	1026.5506.12	RS	2024.3.08	2025.3.07
Spectrum Analyzer	FSEM	1079.8500.31	RS	2024.3.08	2025.3.07
Coaxial Switch	MP59B	M70586	ANRITSU	N/A	N/A
Amplifier	8447D	2727A05019	HP	2024.3.08	2025.3.07
Bilog Antenna	VULB9163	9163/346	Schwarebeck	2024.3.08	2025.3.07
Harmonic & Flicker					
Harmonics Flicker	PACS-1	72307	CI	2024.3.08	2025.3.07
5K VA AC Power source	5001iX	56065	CI	2024.3.08	2025.3.07
Electrostatic Discharge					
Electostastic Discharge Generator	ESD61002AG	PR12092508	Prima	2024.3.08	2025.3.07
Continuous radiated disturbances					
Signal Generator	2022D	119246/004	Maconi	2024.3.08	2025.3.07
Power Amplifier	A00181-1000	9801-116	M2S	2024.3.08	2025.3.07
Power Amplifier	AC8113/ 800-250A	9801-183	M2S	2024.3.08	2025.3.07
Power Antenna	CBL6140A	1209	SCHAFFNER	2024.3.08	2025.3.07
EFT/Surge/Dip					
Fast Transient Burst Simulator	EFT61004BG	PR12074380	Prima	2024.3.08	2025.3.07
Lightning Surge Generator	SUG61005BG	PR12125554	Prima	2024.3.08	2025.3.07
CYCLE SAG SIMULATOR	DRP61011AG	PR12106232	Prima	2024.3.08	2025.3.07
Continuous conducted disturbances					
Signal Generator	2022D	119246/008	Maconi	2024.3.08	2025.3.07
Power Amplifier	A00181-1000	9801-198	M2S	2024.3.08	2025.3.07
CDN	M3-8016	003676	MEB	2024.3.08	2025.3.07
Power-frequency Magnetic field					
Continuous Wave Simulator	UCS 500 M4	0304-55	EM TEST	2024.3.08	2025.3.07
Power Source Network	MV 2616	0104-644	EM TEST	2024.3.08	2025.3.07
Current Transformer	MC2630	--	EM TEST	2024.3.08	2025.3.07
Magnetic Coil	MS100	0304-78	EM TEST	2024.3.08	2025.3.07

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] & Electromagnetic Susceptibility [EMS] tests for CE Marking

3.2 Test Standards

EN 55032:2015+A11:2020 +A1:2020	Electromagnetic compatibility of multimedia equipment - Emission requirements
EN 55035:2017+A11:2020	Electromagnetic compatibility of multimedia equipment - Immunity requirements
EN IEC 61000-3-2:2019 +A1:2021	Electromagnetic compatibility(EMC)- Part 3-2:Limits-Limits for harmonic current emissions(equipment input current ≤16A per phase)
EN IEC 61000-3-3:2013+A1:2019 +A2:2021	Electromagnetic compatibility (EMC)- Part 3-3:Limits-Limitation of voltage changes, Voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤16A per phase and not subject to conditional connection

3.3 Performance Criteria

Criterion A The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer. The minimum level may be instead of that, either being derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Criterion B The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. The minimum level may be instead of that, either being derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Criterion C Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instruction for use.

For further performance criteria details, please refer to Table 14 in EN 55035

3.4 Test standards and Results Summary Tables

Test Condition	Test Requirement	Test Method	Test Result
EMISSION Results Summary			
Conducted Emission on AC Mains, 150KHz to 30MHz	EN 55032:2015+A11:2020 +A1:2020	EN 55032:2015+A11:2020 +A1:2020	Pass
Radiated Emissions, 30MHz to 1000MHz	EN 55032:2015+A11:2020 +A1:2020	EN 55032:2015+A11:2020 +A1:2020	Pass
Harmonic Emissions on AC supply	EN IEC 61000-3-2:2019 +A1:2021	EN 61000-3-2:2019 +A1:2021	Pass
Voltage fluctuations on AC supply	EN 61000-3-3:2013 +A1:2019+A2:2021	EN 61000-3-3:2013 +A1:2019+A2:2021	Pass
IMMUNITY Results Summary			
Electrostatic Discharge	EN 55035:2017+A11:2020	EN 55035:2017+A11:2020	Pass
RF field strength susceptibility	EN 55035:2017+A11:2020	EN 55035:2017+A11:2020	Pass
Electrical Fast transients /Burst Immunity	EN 55035:2017+A11:2020	EN 55035:2017+A11:2020	Pass
Surge	EN 55035:2017+A11:2020	EN 55035:2017+A11:2020	Pass
Conducted susceptibility	EN 55035:2017+A11:2020	EN 55035:2017+A11:2020	Pass
Dips/Voltage Interruption Variation	EN 55035:2017+A11:2020	EN 55035:2017+A11:2020	Pass

Note: 1.The test result judgment is decided by the limit of test standard
2.The information of measurement uncertainty is available upon the customer's request

3.5 Measurement Uncertainty（95% confidence levels, k=2)

No.	Item	MU
1.	Temperature	±0.1℃
2.	Humidity	±1.0%
3.	Conducted emissions	±3.59dB

This uncertainty represents an expanded uncertainty expressed at apprixuinately the 95% confidence level using a coverage factor of k=2

4.0 Electromagnetic Interference Test results

4.1 Power Line Conducted Emission Test

4.1.1 Schematics of the test

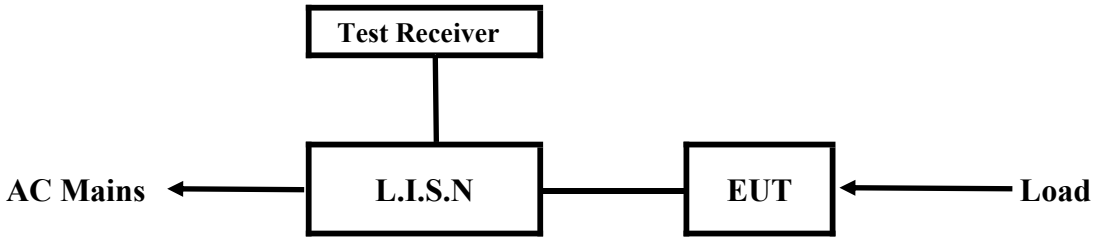

EUT: Equipment Under Test

4.1.2 Test Method and test Procedure

The test was performed in accordance with EN 55032

4.1.3 Test Equipment

Please refer to the Section 2

4.1.4 Power line conducted Emission Limit

Frequency(MHz)	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ～ 0.50	66.0 ～ 56.0	56.0 ～ 46.0
0.50 ～ 5.00	56.0	46.00
5.00 ～ 30.00	60.0	50.00

Notes: 1. decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies

4.1.5 Photo documentation of the test set-up

All tests are conducted according to relevant standards.

4.1.6 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 52% Atmospheric pressure: 100kPa

Frequency range: 0.15 MHz – 30 MHz

4.1.7 Test result

Remarks: According to the EN 55032

Tel: 0755-23284856 Mail: AaronLuo@Eeurber-lab.com http://www.eurber.com/

Interface conducted interference voltage limit of the power cable(150kHz to 30MHz) L

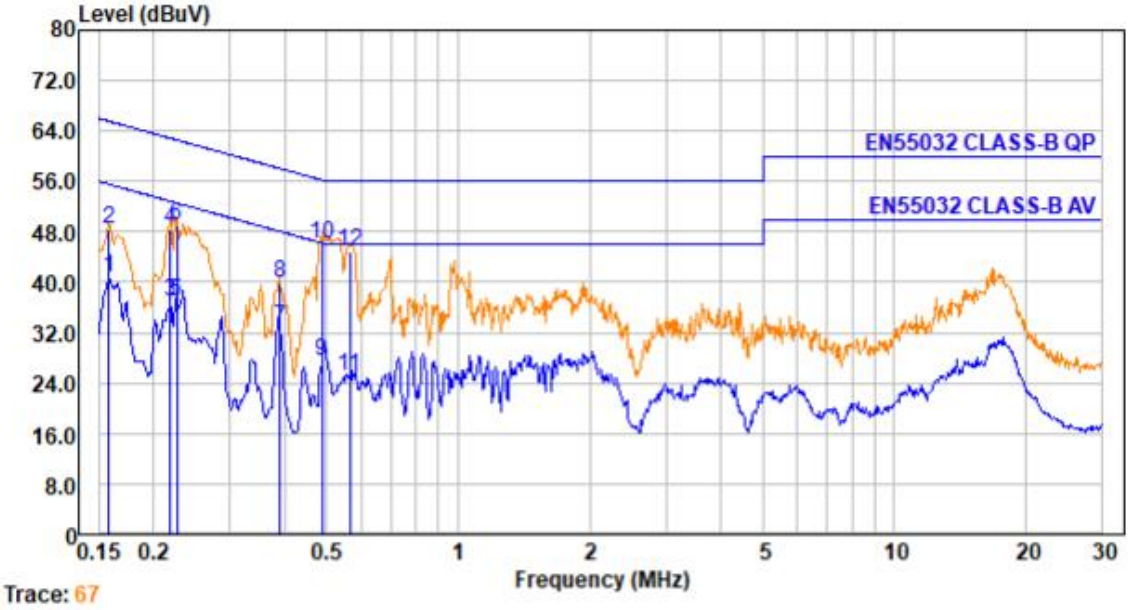

No.	Freq MHz	Cable Loss dB	LISN Factor dB/m	Aux Factor dB	Receiver Reading dBuV	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	0.158	0.08	9.54	10.16	21.00	40.78	55.56	-14.78	Average
2.	0.158	0.08	9.54	10.16	28.50	48.28	65.56	-17.28	QP
3.	0.219	0.10	9.55	10.15	17.00	36.80	52.88	-16.08	Average
4.	0.219	0.10	9.55	10.15	28.59	48.39	62.88	-14.49	QP
5.	0.227	0.10	9.55	10.14	17.26	37.05	52.57	-15.52	Average
6.	0.227	0.10	9.55	10.14	29.11	48.90	62.57	-13.67	QP
7.	0.391	0.08	9.57	10.12	13.10	32.87	48.03	-15.16	Average
8.	0.391	0.08	9.57	10.12	20.10	39.87	58.03	-18.16	QP
9.	0.486	0.06	9.57	10.12	7.81	27.56	46.23	-18.67	Average
10.	0.486	0.06	9.57	10.12	26.40	46.15	56.23	-10.08	QP
11.	0.564	0.07	9.57	10.11	5.21	24.96	46.00	-21.04	Average
12.	0.564	0.07	9.57	10.11	25.20	44.95	56.00	-11.05	QP

Interface conducted interference voltage limit of the power cable (150kHz to 30MHz) N

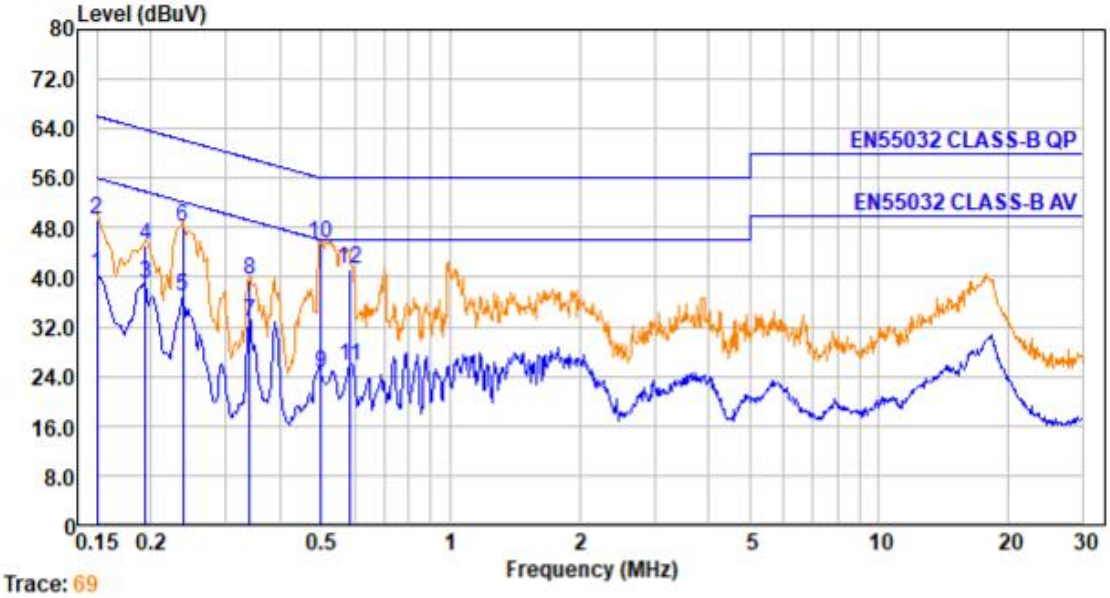

No.	Freq MHz	Cable Loss dB	LISN Factor dB/m	Aux Factor dB	Receiver Reading dBuV	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	0.150	0.08	9.53	10.16	20.54	40.31	56.00	-15.69	Average
2.	0.150	0.08	9.53	10.16	29.50	49.27	66.00	-16.73	QP
3.	0.194	0.09	9.55	10.15	19.31	39.10	53.84	-14.74	Average
4.	0.194	0.09	9.55	10.15	25.30	45.09	63.84	-18.75	QP
5.	0.238	0.10	9.55	10.14	17.25	37.04	52.17	-15.13	Average
6.	0.238	0.10	9.55	10.14	28.21	48.00	62.17	-14.17	QP
7.	0.341	0.10	9.57	10.13	12.94	32.74	49.18	-16.44	Average
8.	0.341	0.10	9.57	10.13	19.89	39.69	59.18	-19.49	QP
9.	0.499	0.06	9.58	10.12	4.71	24.47	46.01	-21.54	Average
10.	0.499	0.06	9.58	10.12	25.60	45.36	56.01	-10.65	QP
11.	0.585	0.07	9.58	10.11	6.05	25.81	46.00	-20.19	Average
12.	0.585	0.07	9.58	10.11	21.70	41.46	56.00	-14.54	QP

4.2 Radiated Emission Test

4.2.1 Test Method: The test was performed in accordance to EN 55032

4.2.2 Block diagram of Test setup

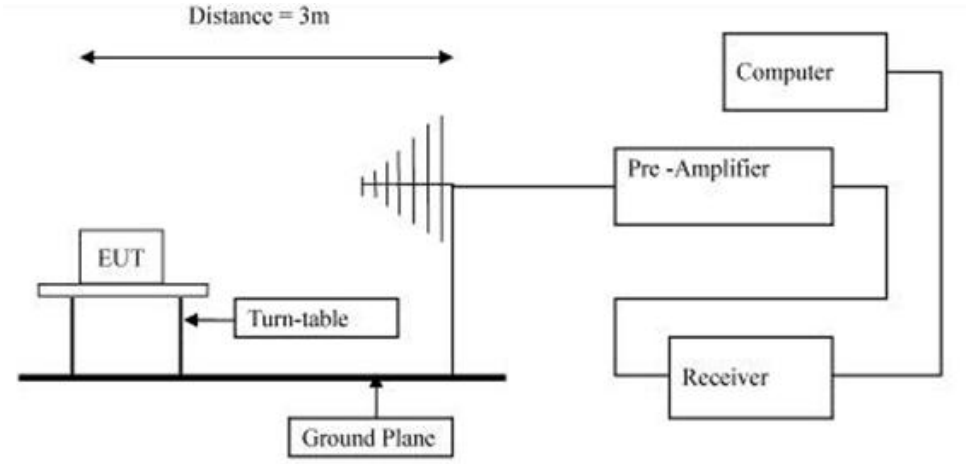

4.2.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Quasi-Peak limits (dB μ V/m)
30-230	3	40.00
230-1000	3	47.00

Note: The lower limit shall apply at the transition frequencies

4.2.4 Photo documentation of the test set-up

Please refer to the Section 7

4.2.5 Test Equipment:

Please refer to the Section 2

4.2.6 Test specification:

Environmental conditions: Temperature 24° C Humidity: 52% Atmospheric pressure: 103kPa

4.2.7 Test result

Remarks: According to the EN 55032

Radiated Emission In Horizontal (30MHz----1000MHz)

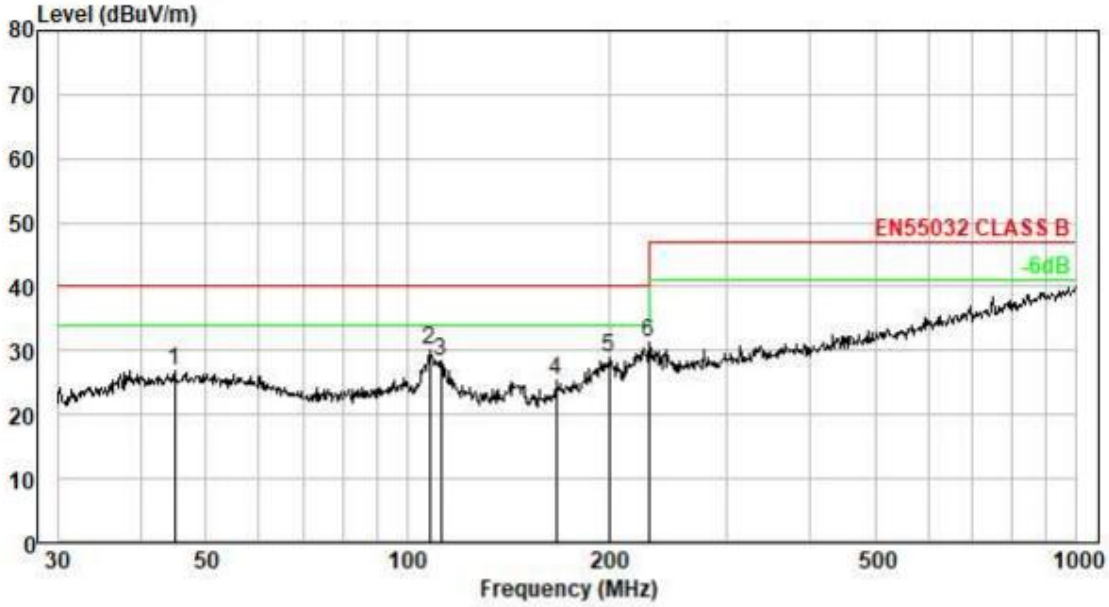

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Preamp Gain dB	Receiver Reading dBμV	Emission Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
1	44.901	0.39	12.60	0.00	13.85	26.84	40.00	-13.16	QP
2	107.888	0.73	11.18	0.00	18.29	30.20	40.00	-9.80	QP
3	112.131	0.75	11.00	0.00	16.68	28.43	40.00	-11.57	QP
4	166.651	0.96	9.14	0.00	15.19	25.29	40.00	-14.71	QP
5	199.986	1.06	11.40	0.00	16.37	28.83	40.00	-11.17	QP
6	229.293	1.13	12.38	0.00	17.86	31.37	40.00	-8.63	QP

environmental conditions	26℃,53%RH
Test Mode:	proper functioning
Tested By:	Eddie Huang
Test Result:	PASS

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
30 ～ 230	- 9.80	H	40
230 ～ 1000	- 8.63	H	47

Radiated Emission In Vertical (30MHz----1000MHz)

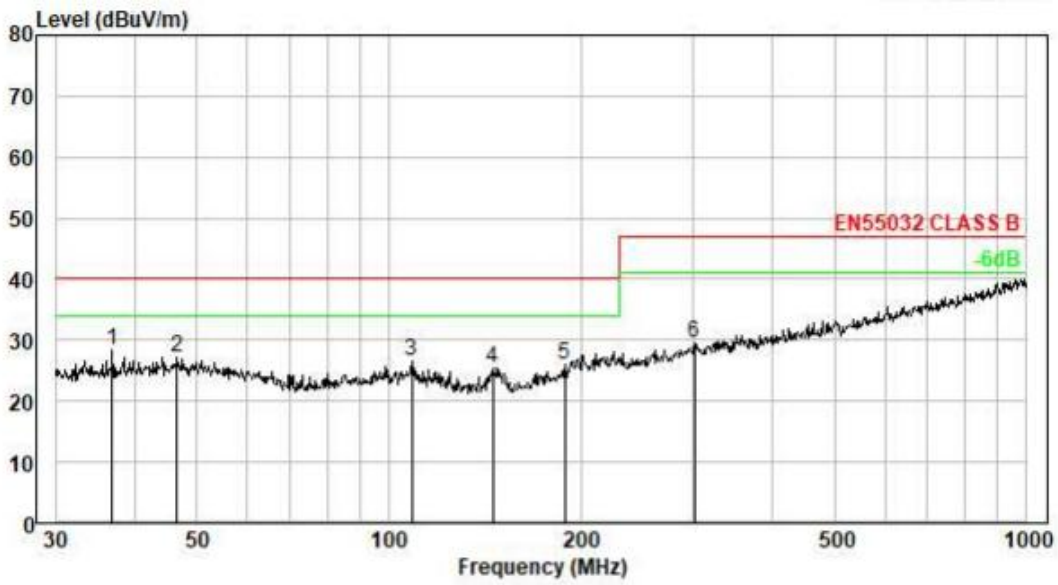

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Preamp Gain dB	Receiver Reading dBµV	Emission Level dBµV/m	Limit dBµV/m	Over Limit dB	Remark
1	36.766	0.32	11.65	0.00	16.39	28.36	40.00	-11.64	QP
2	46.503	0.40	12.64	0.00	14.20	27.24	40.00	-12.76	QP
3	108.647	0.73	11.19	0.00	14.53	26.45	40.00	-13.55	QP
4	145.351	0.89	8.39	0.00	16.15	25.43	40.00	-14.57	QP
5	189.074	1.03	10.98	0.00	13.93	25.94	40.00	-14.06	QP
6	301.422	1.28	14.32	0.00	14.06	29.66	47.00	-17.34	QP

environmental conditions	26℃,53%RH
Test Mode:	proper functioning
Tested By:	Eddie Huang
Test Result:	PASS

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30 ～ 230	- 11.64	V	40
230 ～ 1000	- 17.34	V	47

4.3 Harmonic Current Emissions

4.3.1 EUT Operating Mode

Full Load

4.3.2 Block Diagram of Test Setup.

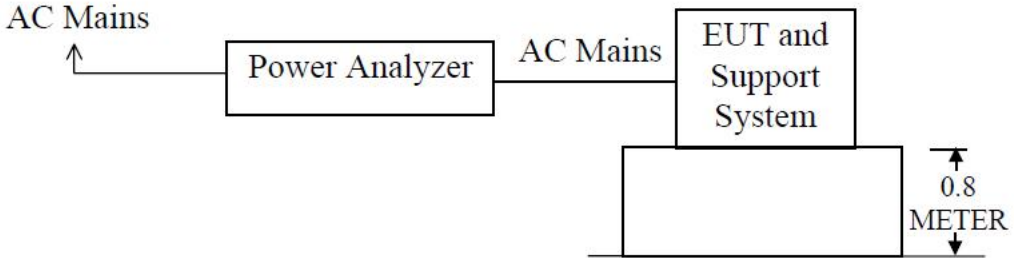

This test was performed as per EMC Basic Standard EN 61000-3-2

4.3.3 Test Equipment

Please refer to Section 2 this report.

4.3.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 103kPa

4.3.5 Limits of harmonics current

Equipment Category	Harmonic Order n	Max.Permissible Harmonic Current (in Ampers)
Class D	Odd Harmonics	
	3	0.23
	5	1.14
	7	0.77
	9	0.40
	11	0.33
	13	0.21
	15<=n<=39	0.15x15/n
	Even Harmonics	
	2	1.08
	4	0.43
	6	0.30
	8>=n>=40	0.23x8/n

EN 61000-3-2/IEC 61000-3-2			
Equipment Category	Harmonic Order n	Max.Permissible Harmonic Current (in A)	(mA/w)
Class D	3	2.30	3.4
	5	1.14	1.9
	7	0.77	1.0
	9	0.40	0.5
	11	0.33	0.35
	13	0.21	0.30
	15>=n>=39	0.15x 15/n	3.85n
	Only odd harmonics required		

4.3.6 Test procedure

a.The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.

b.The classification of EUT is according to section 5 of IEC/EN 61000-3-2. The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as

Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools. Portable tools.; Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.

Class D: Equipment having a specified power less than or equal to 600W of the following types: Personal computers and personal computer monitors and television receivers.

c.The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

4.3.7 Results

Port	EUT Operating mode	Result (Passed / Failed)
AC Input	Full Load	N/A

N/A=Not Applicable

This test item is not required for this prototype

Note 1: Equipment with a rated power of 75W or less, other than lighting equipment.

Note 2: This value may be reduced from 75 W to 50 W in the future, subject to approval by National Committees at that time.

– professional equipment with a total rated power greater than 1 kW

– symmetrically controlled heating elements with a rated power less than or equal to 200 W

– independent dimmers for incandescent lamps with a rated power less than or equal to 1 kW.

Tel: 0755-23284856 Mail: AaronLuo@Eeurber-lab.com http://www.eurber.com/

4.4 Flicker and Voltage Fluctuation

4.4.1 EUT Operating Mode

Full Load

4.4.2 Block Diagram of Test Setup.

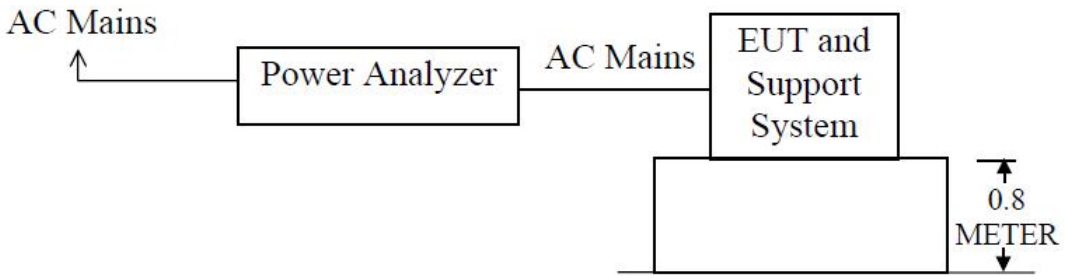

This test was performed as per EMC Basic Standard EN 61000-3-3

4.4.3 Limits of Voltage Fluctuation and Flicks Measurement

Test Item	Limit	Note
P_{st}	1.0	Pst means short-term flicker indicator
P_{lt}	0.65	Plt means long-term flicker indicator
T_{dt} (ms)	200	Tdt means maximum time that dt exceeds 3%.
d_{max} (%)	4	Dmax means maximum relative voltage change.
dc (%)	3	Dc means relative steady-state voltage change.

4.4.4 Test Equipment

Please refer to Section 2 this report.

4.4.5 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 103kPa

4.4.6 Results

Port	EUT Operating mode	Result (Passed / Failed)
AC Input	Full Load	Pass

Tel: 0755-23284856 Mail: AaronLuo@Eeurber-lab.com http://www.eurber.com/

5.0 Immunity Test

5.1 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD) (EN55035)

5.1.1 Schematic of the test

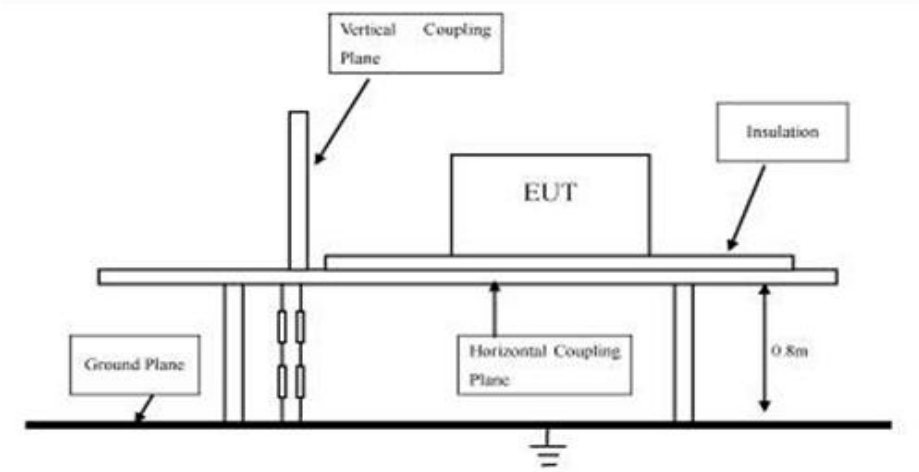

5.1.2 TEST SPECIFICATION

Basic Standard:	IEC EN 61000-4-2
Discharge Impedance:	330 ohm / 1 50 pF
Discharge Voltage:	Contact Discharge : 4 kV (Direct &Indirect) Air Discharge: 8kV (Direct)
Polarity:	Positive / Negative
Number of Discharge:	20 times at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1-second

Performance Criterion Require: B

5.1.3 Test Equipment

Please refer to Section 2 this report

5.1.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 52% Atmospheric pressure: 101kPa

5.1.5 Operation mode: Full Load

5.1.6 Discharge location
- HCP
- VCP
- EUT

5.1.7 Test Result Pass

5.2 RF field strength susceptibility (80MHz------1000MHz)

5.2.1 Test Method:

The test was performed in accordance with IEC EN 61000-4-3

Severity: Level 2 (3V/m)

Modulation: 1 KHz 80% AM

Performance Criterion Require: **A**

Block diagram of Test setup

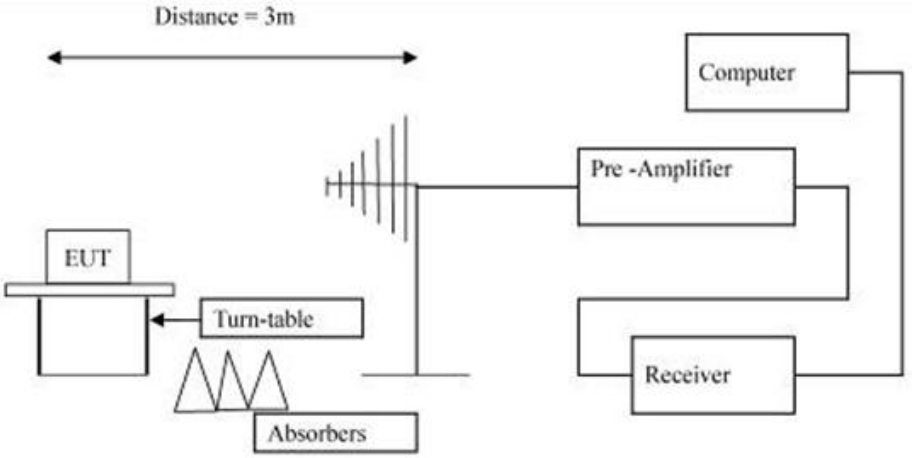

5.2.2 Test Equipment

Please refer to Section 2 this report.

5.2.3 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 55% Atmospheric pressure: 103kPa

5.2.4 Operation mode: Full Load

5.2.5 Test Result:

Please refer to the following table for individual results.

Frequency (MHz)	Radiation to	Polarity	Field Strength （V/m）	Observation	Results
80-1000	Front	Horizontal	3	Note	Pass
80-1000	Rear	Horizontal	3	Note	Pass
80-1000	Left	Horizontal	3	Note	Pass
80-1000	Right	Horizontal	3	Note	Pass
80-1000	Front	Vertical	3	Note	Pass
80-1000	Rear	Vertical	3	Note	Pass
80-1000	Left	Vertical	3	Note	Pass
80-1000	Right	Vertical	3	Note	Pass

Note: There was no change conpared with the initial operation during the test

5.3 Electrical Fast Transient/Burst (EFT/B) immunity test

5.3.1 Schematics of the test



5.3.2 Test Method

The test was performed in accordance with IEC EN 61000-4-4

Severity: Level 2 (1kV)

Performance Criterion Require: **B**

Block diagram of Test setup

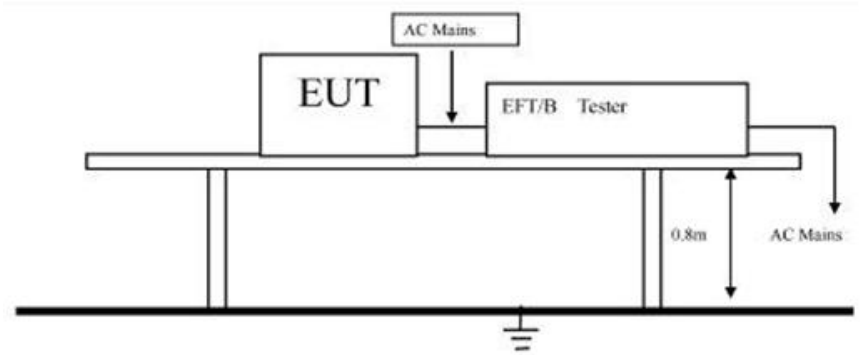

5.3.3 Test Equipment

Please refer to Section 2 this report.

5.3.4 Test specification:

Environmental conditions: Temperature: 22° C Humidity: 54% Atmospheric pressure: 103kPa

5.3.5 Operation mode: Full Load

5.3.6 Test Results

Inject location: AC mains

Inject Line	Voltage kV	Rise time/hold time	repetition frequency	Observations (Performance Criterion)	Results
L	±1	5/50 ns	5kHz	A	Pass
N	±1	5/50 ns	5kHz	A	Pass
L-N	±1	5/50 ns	5kHz	A	Pass
PE	±1	5/50 ns	5kHz	A	Pass
L-PE	±1	5/50 ns	5kHz	A	Pass
N-PE	±1	5/50 ns	5kHz	A	Pass
L-N-PE	±1	5/50 ns	5kHz	A	Pass

Note: N/A=Not applicable

5.4 Surge test

5.4.1 Schematics of the test



5.4.2 Test Method:

The test was performed in accordance with IEC EN 61000-4-5

Severity: Level 2

Performance Criterion Require: **B**

Block diagram of Test setup

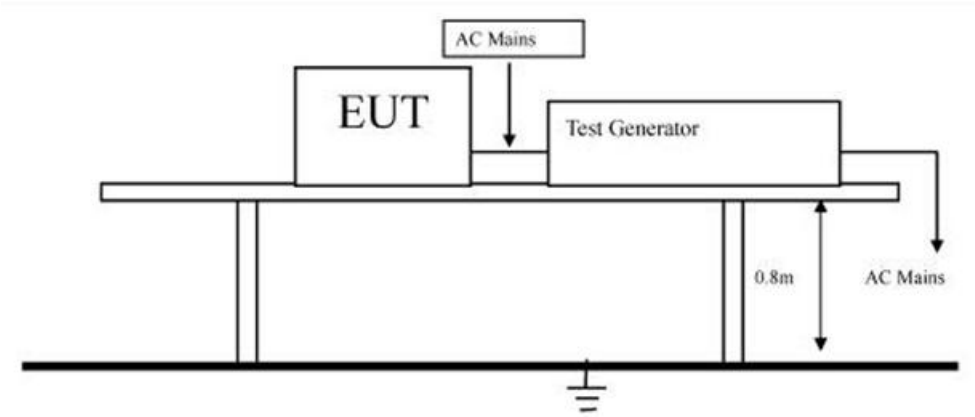

5.4.3 Test Equipment

Please refer to Section 2 this report.

5.4.4 Test specification:

Environmental conditions: Temperature: 24° C Humidity: 52% Atmospheric pressure: 102kPa

5.4.5 Operation mode: Full Load

5.4.6 Test Results

5 pulses for each polarity and test voltage, and repetition rate is 1 per min.

Location	Polarity （kV）	Wave-shape data	Surge Interval	0° /90° /180° /270°	Observations (Performance Criterion)	Results
L-N	±0.5/±1	1.2/50 μs	60s	Test Angle	A	Pass
L-PE	±2	1.2/50 μs	60s	Test Angle	A	Pass
N-PE	±2	1.2/50 μs	60s	Test Angle	A	Pass

Note: N/A=Not applicable

5.5 Conducted Immunity test

5.5.1 Schematics of the test

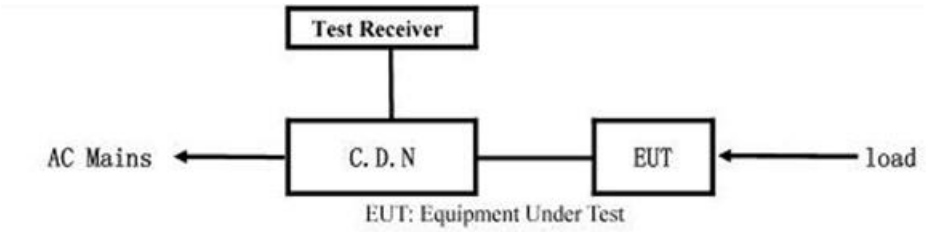

5.5.2 Test Method

The test was performed in accordance with IEC EN 61000-4-6

Severity: Level 2 (3 V rms),

Performance Criterion Require: **A**

Block diagram of Test setup

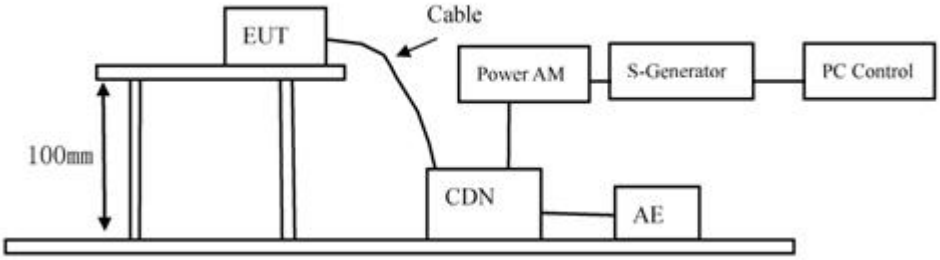

5.5.3 Test Equipment

Please refer to Section 2 this report.

5.5.4 Test specification:

Environmental conditions: Temperature: 22° C Humidity: 50% Atmospheric pressure: 102kPa

5.5.5 Operation mode: Full Load

5.5.6 Test Results:

Frequency Range (MHz)	Injected Position	Strength	Observations (Performance Criterion)	Result
0.15 - 80	AC Line	3V (rms) Unmodulated	A	Pass
80-230	AC Line	3V (rms) Unmodulated	A	N/A

Note: N/A=Not applicable

5.6 Voltage Dips/Interruptions immunity test

5.6.1 Schematics of the test



5.6.2 Test Method:

The test was performed in accordance with IEC EN 61000-4-11

Performance Criterion Require: **B&C**

Block diagram of Test setup

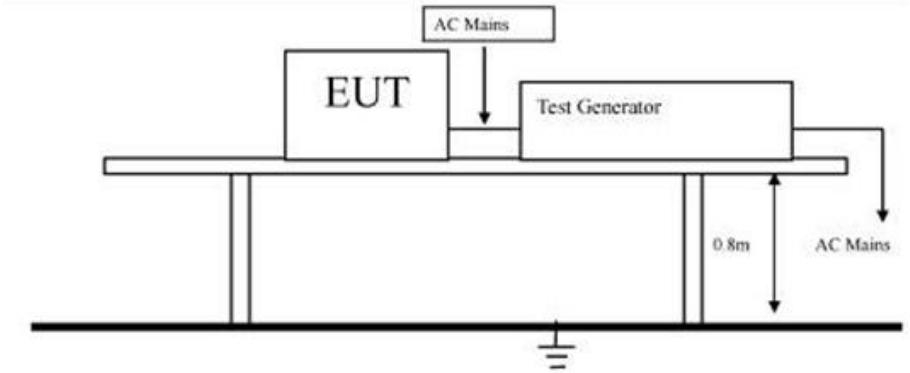

5.6.3 Test Equipment

Please refer to Section 2 this report.

5.6.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 50% Atmospheric pressure: 103kPa

5.6.5 Operation mode: Full Load

5.6.6 Test Result:

Test power：230VAC,50Hz

Test Level % Ut	Voltage dips &short interruptions % Ut	Duration(in period)	Observations (Performance Criterion)	Result
0	100	0.5	B	Pass
70	30	25	C	Pass
0	100	250	C	Pass

Note: A. There was no change compared with initial operaion during and after the test

No unintentional response was found during the test

B.The function stopped during the test,but can be recoverable by itself operation after the test

C.The function stopped during the test,but can be recoverable manually after the test

Tel: 0755-23284856 Mail: AaronLuo@Eeurber-lab.com http://www.eurber.com/

6.0 CE Label

6.1 label specification

Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.

6.2 Mark Location: On the product body

7.0 Photos of the EUT

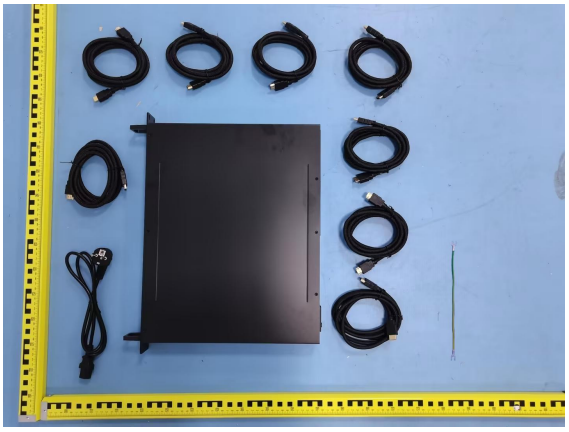
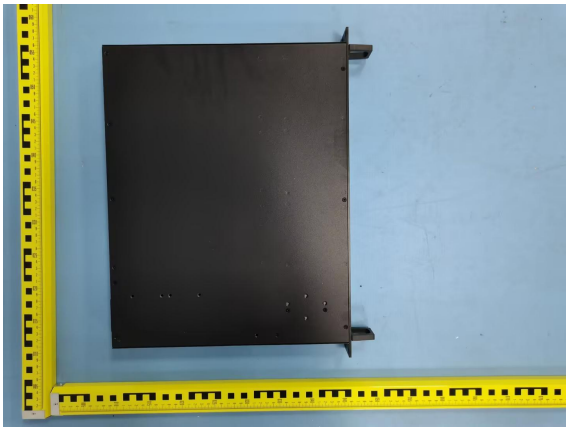

--End of the report--